


240 VOLT GFCI AND DISCONNECT

An innovative control that sets new standards in ground fault protection.


FEATURES:

- Easy to use pull-out disconnect
- Optional semi-flush surface mount kit.
- Rainproof disconnect to meet NEMA 3R standards for surface mounting.
- 3 pole 50 amp contactor opens 'L1', 'L2' and neutral.
- Leviton class 'A' high current GFCI provides load side grounded neutral protection on 3 wire (240V) and 4 wire (110/220V) installations.
- Complies with NEC 680.42 & 680.12 □ UL listed (6229) □ Unbalanced loading between 'L1' and 'L2' to neutral will not cause nuisance tripping.
- Knockout holes on back, bottom, and sides.


- Ideal for use with spas, swimming pools, fountains, submersible and therapeutic equipment.
- Self contained "2 in 1" unit solves space and compatibility issues.

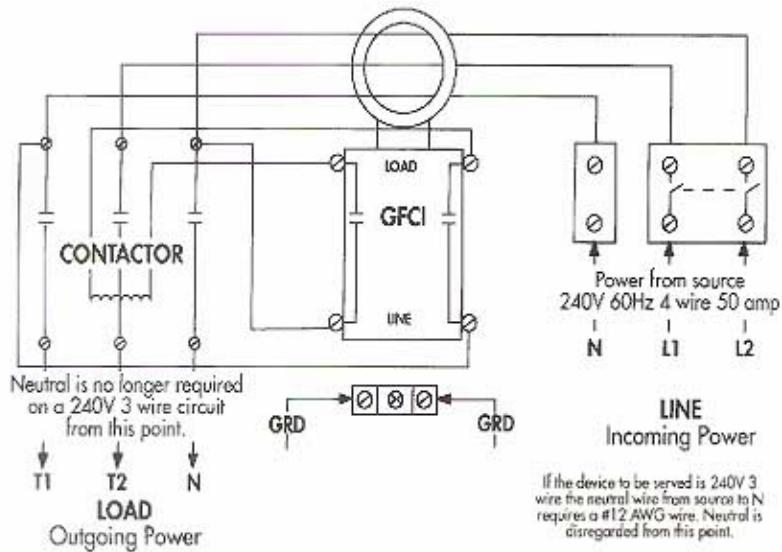

**MODEL LC220-D
50 AMP**

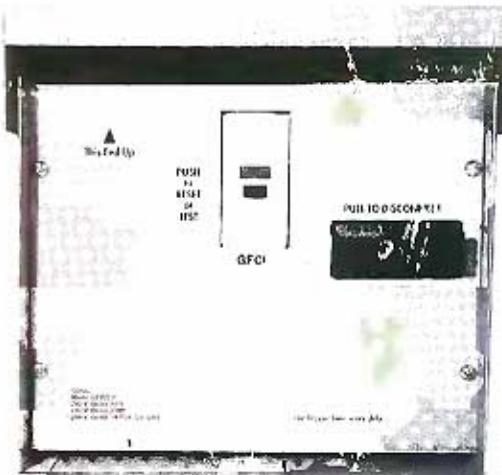

INSIDE PANEL VIEW
(accessible without the use of tools)

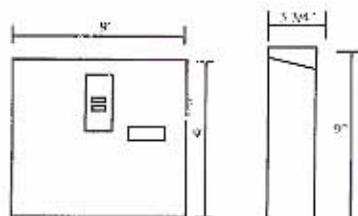

LISTED
6229